





Comstock Bobcat/Fox Traps

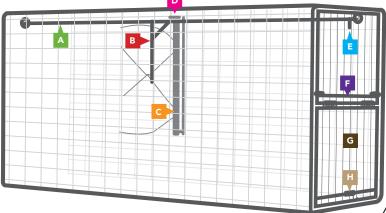


Set the Swing Bar

- Locate the (C) Swing Bar and move toward the side of the trap temporarily, so it doesn't interfere with the (B) Trigger Stop.
- Rotate (A) Trigger Rod up using the (E) Trigger Pin at the other end of the trap.
- Rotate swing bar back so that it is perpendicular to the side of trap. Drop the (B) Trigger Stop until it sits on the (D) Swing Bar Rest located at the top of the Swing Bar.




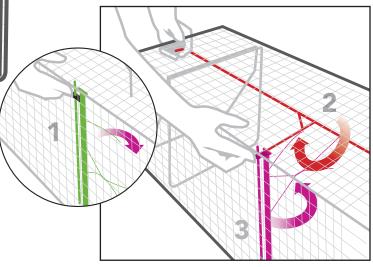


Set the Door



4. Locate the **(F)** Door Lock Bar. Slide to top of trap frame.



 Push in the center door hinge while lifting from the bottom to fold the (G) Bi-fold Door in half. Lift door to top of trap.



6. While holding the door open with one hand, use other hand to align and roll the (H) Door Hook over the Trigger Pin. The trap door is now set. For double door traps, repeat steps with the other door.





Call: 800-272-8727 | Online: www.livetrap.com